

# AENOR



## AENOR Product Certificate



034/001430

AENOR certifies that the organization

**TEJAS VEREA, S.A.U.**

registered office LANZÁ, S/N 15685 MESÍA (A Coruña - España)

supplies **Clay roofing tiles and fittings**

in compliance with UNE-EN 1304:2020 (EN 1304:2013)

Nº Technical Form 0310217 (see annex)

Production site LANZÁ, S/N 15685 MESÍA (A Coruña - España)

Certification scheme This Certificate has been granted in accordance with the stipulations of AENOR Specific Rules RP 034.02

This certificate supersedes 034/001430, dated 2019-08-22


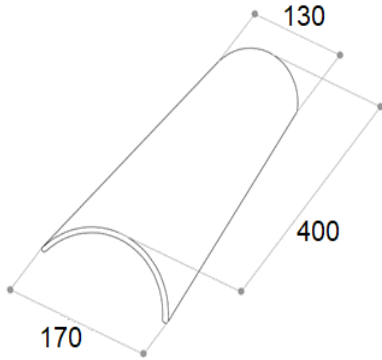
First issued on 2009-12-15  
Modified on 2024-03-15  
Validity 2029-03-15

Rafael GARCÍA MEIRO  
CEO



**AENOR CONFÍA S.A.U.**  
Génova, 6. 28004 Madrid. España  
Tel. 91 432 60 00.- [www.aenor.com](http://www.aenor.com)

## AENOR MARK FOR CLAY ROOFING TILES AND FITTINGS TECHNICAL FORM N°: 0310217

Stamp and signature:	MANUFACTURER:	TEJAS VEREA, S.A.U.							
	MADE IN:	LANZA, S/N -15685 MESIA (A CORUÑA)							
	TILE DESCRIPTION:	OVER & UNDER TILE EN 1304							
	BRAND NAME:	VEREA CURVA 40X17							
<b>PRODUCT TECHNICAL CHARACTERISTICS</b>									
<b>MANUFACTURER GUARANTEED VALUES</b>					<b>AENOR REQUIRED VALUES</b>				
<b>REQUIRED</b>									
<b>Nominal dimensions (mm)</b>				Structural characteristics (% faults)	EN 1304	LCA 2,5 (I)	LCA 2,5 (I)		
		Length	Width						
Individuals	X	400		Length tolerance (%)	EN 1024	± 2,0	± 2,0		
Overlap									
<b>Over and Under Tiles</b>				Width tolerance (%) (not applicable in Over and Under)	EN 1024	N/A	N/A		
		Maximum width	Minimum width						
		170	130	Uniformity of the transverse profile (mm) (Only for Over and Under Tiles)	EN 1024	≤ 15	≤ 15		
<b>Impermeability</b>									
		Category 1	X	Test method 1	X	EN 539-1	≤ 0,5	≤ 0,5	
		Category 2		Test method 2					
<b>Frost resistance</b>				Camber/Twist (%)	EN 539-1	≤ 0,6	≤ 0,6		
		Level 1 (n° cycles without damages ≥ 150)						X	
		Level 2 (n° cycles without damages ≥ 90)			D.2 RP 34.02	N/A	N/A		
<b>OPTIONAL CHARACTERISTICS ANNEX D RP 34 02</b>									
		YES	NO	Impermeability (cm <sup>3</sup> /cm <sup>2</sup> * d)	D.2 RP 34.02	N/A	N/A		
		Impermeability (D.2 RP 34.02)							
		Frost Resistance (D.3 RP 34.02)							
<b>TILE SKETCH</b>						Mean Value	EN 538	≥ 1000	≥ 1000
									
						<p style="text-align: center;">170                      130</p> <p style="text-align: right;">400</p>			
<p style="text-align: center;">Piece without water repellent treatment</p>									
						<p style="text-align: center;">Accessories:</p> <p>Eave tile, Hip &amp; Ridge Tile</p>			
<p style="text-align: center;">Additional information given by the manufacturer <sup>(1)</sup></p>									
						<p>Unitary mass (in grams):                      1650</p>			
<p>Roof tiles number in m<sup>2</sup> (with one decimal):                      variable according to overlap</p>									
						<p>Length distance between battens (cm):</p>			
<p>Surface finish:                      Decoration with colored engobes</p>									
						<p>Mass coloration:                      Red, brown, graphite, ohio</p>			
<p>Fixing types:                      Hook, screws and polyurethane foam</p>									
						<p>Further information:                      λ (by testing): 0,22 W/mK Recommended installation by D.I.T. N.° 622p/22</p>			
<p>Fire reaction performance                      EN 13501-1                      A1                      A1</p>									
						<p>External fire performance                      EN 13501-5                      Broof (t1/t2/t3)                      Broof (t1/t2/t3)</p>			

<sup>(1)</sup> This information is out of the AENOR Mark and ENAC accreditation scopes. AENOR is not responsible for the information in this square

Water repellent treatment if is requested