

AENOR



AENOR Product Certificate



034/002020

AENOR certifies that the organization

TEJAS VEREA, S.A.U.

registered office LANZÁ, S/N 15685 MESÍA (A Coruña - España)

supplies **Clay roofing tiles and fittings**

in compliance with UNE-EN 1304:2020 (EN 1304:2013)

Nº Technical Form 0310223 (see annex)

Production site LANZÁ, S/N 15685 MESÍA (A Coruña - España)

Certification scheme This Certificate has been granted in accordance with the stipulations of AENOR Specific Rules RP 034.02

This certificate supersedes 034/002020, dated 2023-12-12


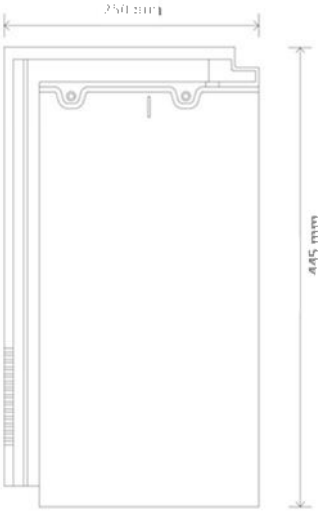
First issued on 2023-12-12
Modified on 2025-09-25
Validity 2030-09-25

Rafael GARCÍA MEIRO
CEO



AENOR CONFÍA S.A.U.
Génova, 6. 28004 Madrid. España
Tel. 91 432 60 00 - www.aenor.com

AENOR MARK FOR CLAY ROOFING TILES AND FITTINGS TECHNICAL FORM N°: 0310223

| | | | | | |
|--|--------------------------|---|------------------|---------------------------------------|---|
| Stamp and signature: | MANUFACTURER: | TEJAS VERA, S.A.U. | | |  |
| | MADE IN: | LANZÁ, S/N-15685 MESIA (A CORUÑA) | | | |
| | TILE DESCRIPTION: | PLAIN CLAY ROOF TILE WITH SIDELock AND HEADLOCK EN 1304 | | | |
| | BRAND NAME: | TEJA PLANA ETERNAL | | | |
| PRODUCT TECHNICAL CHARACTERISTICS | | | | | |
| MANUFACTURER GUARANTEED VALUES | | | | | AENOR REQUIRED VALUES |
| REQUIRED | | | | | |
| Nominal dimensions (mm) | | | | | |
| | | Length | Width | | |
| Individuals | X | 445 | 250 | | |
| Overlap | | | | | |
| Over and Under Tiles | | | | | |
| | | Maximum width | Minimum width | | |
| | | - | - | | |
| Impermeability | | | | | |
| Category 1 | | X | Test method 1 | X | |
| Category 2 | | | Test method 2 | | |
| Frost resistance | | | | | |
| Level 1 (n° cycles without damages ≥ 150) | | | | X | |
| Level 2 (n° cycles without damages ≥ 90) | | | | | |
| OPTIONAL CHARACTERISTICS ANNEX D RP 34.02 | | | | | |
| | | YES | NO | | |
| Impermeability (D.2 RP 34.02) | | | X | | |
| Frost Resistance (D.3 RP 34.02) | | | X | | |
| TILE SKETCH | | | | | |
|  | | | | | |
| Piece without water repellent treatment | | | | | |
| Accessories: | | | | | |
| Half Tile, Ridge Tile, Hip Start, Ridge Cap, 3- and 4-water meeting, universal side finish | | | | | |
| | | Structural characteristics (% faults) | ISO 2859-1 | LCA 2,5 (I) | LCA 2,5 (I) |
| | | Length tolerance (%) | EN 1024 | ± 2,0 | ± 2,0 |
| | | Width tolerance (%) (not applicable in Over and Under | | ± 2,0 | ± 2,0 |
| | | Uniformity of the transverse profile (mm) (Only for Over and Under Tiles) | | N/A | N/A |
| | | Camber/Twist (%) | | ≤ 1,5 | ≤ 1,5 |
| | | Impermeability (cm ³ /cm ² * d) | Mean Value | EN 539-1 | ≤ 0,5 |
| | | | Individual Value | | ≤ 0,6 |
| | | | Mean Value | D.2 RP 34.02 | N/A |
| | | | Individual Value | | N/A |
| | | Flexural strenght (N) | EN 538 | ≥ 900 | ≥ 900 |
| | | Frost resistance (cycles) | EN 539-2 | 1000 | ≥ 150 |
| | | | D.3 RP 34.02 | N/A | N/A |
| | | Fire reaction performance | EN 13501-1 | A1 | A1 |
| | | External fire performance | EN 13501-5 | Broof (t1/t2/t3) | Broof (t1/t2/t3) |
| Additional information given by the manufacturer ⁽¹⁾ | | | | | |
| | | Unitary mass (in grams): | | 3300 | |
| | | Roof tiles number in m ² (with one decimal): | | 12 | |
| | | Length distance between battens (cm): | | variable according to overlap (38-32) | |
| | | Surface finish: decoration with colored engobe | | | |
| | | Mass coloration: red, brown | | | |
| | | Fixing types: hook, screws, polyurethane foam and polymers | | | |
| | | Further information: | | | |

⁽¹⁾ This information is out of the AENOR Mark and ENAC accreditation scopes. AENOR is not responsible for the information in this square